


ZFC|ZFV

ZFC|ZFV Interruptor seccionador para corriente continua 2P

Calibre 00
A 16|25|32|40|55
600 - 1000 - 1500 Vdc

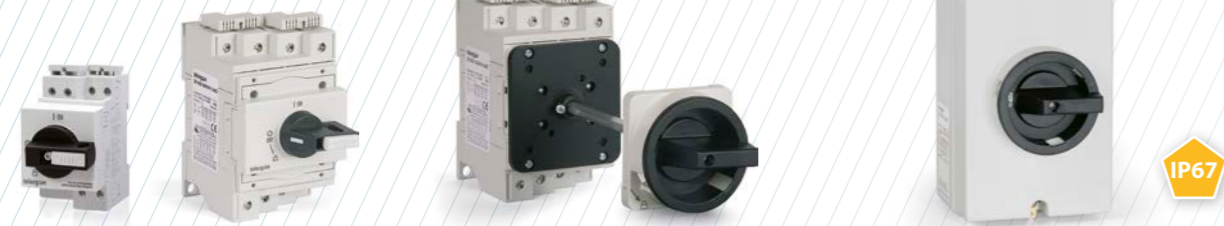

IP67

CÓDIGO 2P

16A	ZFC16SMAH1NA4O
25A	ZFC25SMAH1NA4O
32A	ZFV32SMAH1A4O
40A	ZFV40SMAH1A4O
55A	ZFV55SMAH1A4O

CÓDIGO 2P

16A	ZFC16VZVH4A4O
25A	ZFC25VZVH4A4O
32A	ZFV32VZVH4A4O
40A	ZFV40VZVH4A4O
55A	ZFV55VZVH4A4O

CÓDIGO 2P

16A	ZFC16PFLH4A4O
25A	-
32A	ZFV32PFLH4A4O
40A	-
55A	ZFV55PFLH4A4O




Información técnica



Según IEC 60947-3
DC-PV1
UL508i
IEC 60947-3


			ZFC16	ZFC25	ZFV32	ZFV40	ZFV55	
Intensidad de empleo	le 2 Polos en serie	IEC	1000Vdc A	9 DC21A	11 DC21A	13 DC21B	29 DC21B	36 DC21B
			1500Vdc A	3 DC21A	4 DC21A	6 DC21B	7,5 DC21B	10 DC21B
	le 4 Polos en serie	IEC	1000Vdc A	16 DC21A	25 DC21A	32 DC21B	40 DC21B	55 DC21B
			1500Vdc A	16 DC21A	20 DC21A	32 DC21B	40 DC21B	55 DC21B
Intensidad de cortocircuito condicional	le 2 Polos en serie	IEC	1000Vdc A	10 DCPV1	11,5 DCPV1	13 DCPV1	29 DCPV1	36 DCPV1
			1500Vdc A	3 DCPV1	5 DCPV1	6 DCPV1	7,5 DCPV1	10 DCPV1
	le 4 Polos en serie	IEC	1000Vdc A	16 DCPV1	25 DCPV1	32 DCPV1	40 DCPV1	55 DCPV1
			1500Vdc A	16 DCPV1	25 DCPV1	32 DCPV1	40 DCPV1	55 DCPV1
Max. Calibre fusible		gL (gG)	A	40	63	80	125	160
Sección de cable máxima (puente incluido)								
Rígido o trenzado		mm ²	1,5 - 10	1,5 - 10	4 - 16	2,5 - 25	2,5 - 25	
Flexible		mm ²	1,5 - 6	1,5 - 6	4 - 10	2,5 - 16	2,5 - 16	
Flexible (+ multifilar)		mm ²	1,5 - 6	1,5 - 6	4 - 10	1,5 - 16	1,5 - 16	
Terminal de conexión			M3,5 Pz1	M3,5 Pz1	M4 Pz2	M5Pz2	M5Pz2	
Par de apriete		Nxm	1,4	1,4	1,7 - 1,8	2,5 - 2,8	2,5 - 2,8	
Amperios-prestaciones "Uso general"	2 Polos en serie	UL	600Vdc A	16	25	32	40	55
			1000Vdc A	-	-	-	16	20
	4 Polos en serie	UL	600Vdc A	16	25	32	40	55
			1000Vdc A	-	-	-	40	55
Calibre fusible (RKS)	5 kA / 600V	A	40	60	80	-	-	
Interruptor uso industrial								
Calibre fusible (RKS)	5 kA / 1000V	A	-	-	-	160	160	
Interruptor uso industrial								
Sección de cable máxima (puente incluido)								
Rígido o trenzado		AWG	16 - 10	16 - 10	12 - 10	16 - 10	16 - 10	
Flexible		AWG	20 - 6	20 - 6	12 - 6	14 - 4	14 - 4	
Flexible (+ multifilar)		AWG	20 - 6	20 - 6	12 - 6	-	-	
Terminal de conexión			M3,5 Pz1	M3,5 Pz1	M4 Pz2	M5Pz2	M5Pz2	
Par de apriete		Nxm	1,7 - 1,8	1,7 - 1,8	1,7 - 1,8	2,5 - 2,8	2,5 - 2,8	

Accesorios




» Puentes con aislamiento incluidos
CÓDIGO ZTC-B1 16-25 A
ZFV-B1 32 A
ZFV-B2 40-55 A

Dimensiones (mm)

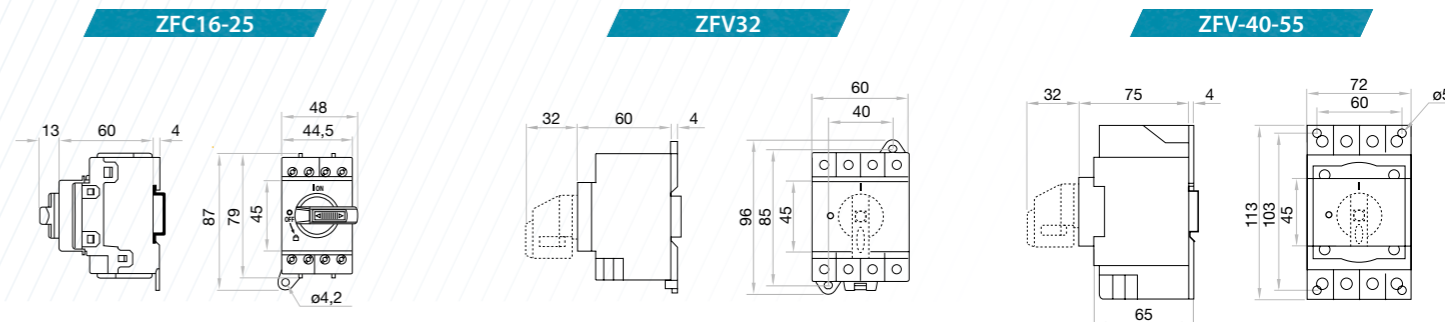


ZFC16-25

Mecanización mando panel

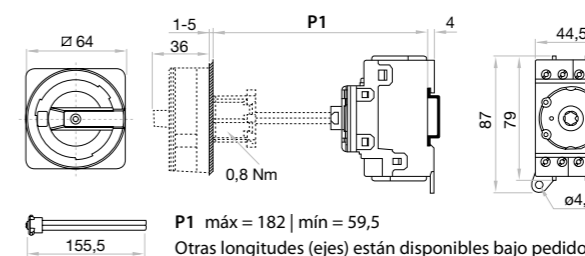


ZFV32


Mecanización mando panel

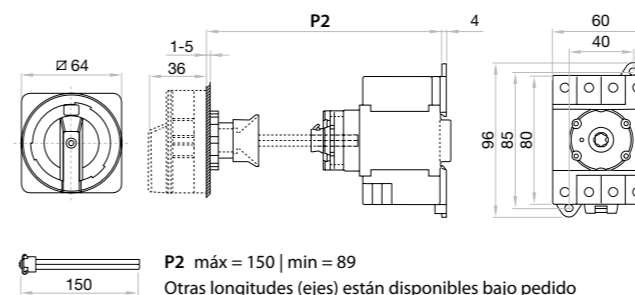

ZFV40-55

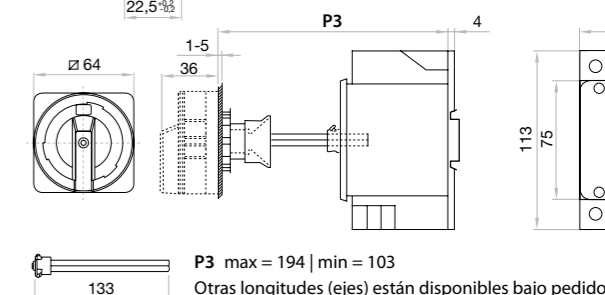

ZFC16 - ZFV32

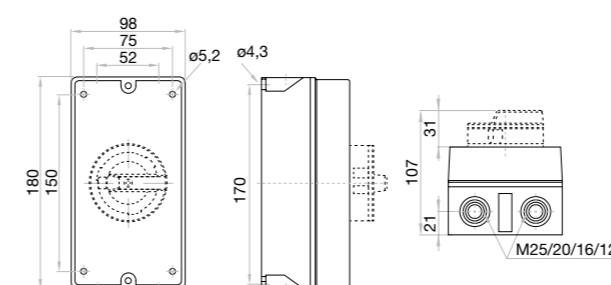

ZFV55

